



WYMIARY BLOKÓW OPOROWYCH
DLA CIŚNIENIA PRÓBNEGO 1,0 MPa

Srednica nomininalna D mm	Kat zaklamania α	A mm	B mm	h mm	b mm	l mm
50-80	90	200	200	200	200	300
	45	200	200	200	200	200
100	90	300	200	200	200	350
	45	300	200	200	200	300
150	90	400	200	200	200	300
	45	400	200	200	200	300
200	90	600	250	450	250	1100
	45	500	250	450	250	600
250	90	700	300	600	380	1350
	45	550	300	600	380	650
300	90	800	400	650	380	1500
	45	550	400	650	380	850
	30	500	400	650	250	700

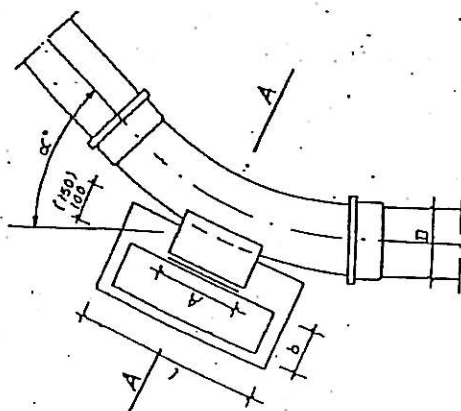


PRZEKRÓJ A - A




Podsyпка z tłucznia

BETON B-10

PRZEKRÓJ A - A

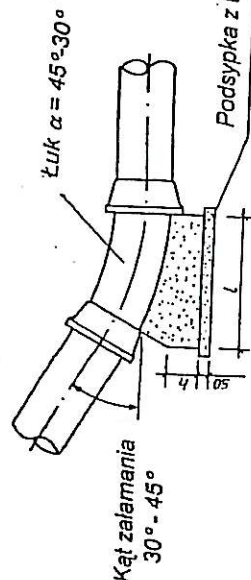

PRZEKRÓJ B - B



WYMIARY BLOKÓW OPOROWYCH

Srednica wewn. D mm	Kat zaklamania α	h mm	A mm	l mm
100	45	100	300	300
	30	180	300	300
150	45	150	400	400
	30	150	350	350
200	45	200	600	600
	30	200	400	400
250	45	250	700	700
	30	250	600	600
300	45	250	750	750
	30	250	700	700

